

Trove3BWC and Trove3SWC

Trove Compatible Battery/Wire Enclosure



Altronix Trove3BWC and Trove3SWC are dual-purpose enclosures that can be used as wiring troughs or battery cabinets when mounted above or below (Trove3BWC) or on either side (Trove3SWC) of the Trove integrated power and access solution. The knockouts on the Trove3BWC and Trove3SWC have been strategically placed to line up with the Trove3 allowing for easy conduit connections between cabinets. Trove3BWC and Trove3SWC include camlocks and 2 tamper switches each to ensure access to wiring and batteries is secure.



Trove3BWC



Trove3SWC

Features

- 16 AWG powder coated steel
- Convenient knockout configuration
- Cam lock, tamper switches and mounting hardware included

Specifications

Trove3BWC:

- Five (5) single knockouts 2.415" (2" Conduit)
- One (1) double knockout
1.948" (1.5" Conduit) / 1.701" (1.25" Conduit)
- Six (6) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)

Capacity

- Accommodates up to four (4) 12VDC/18AH batteries

Physical and Environmental

Dimensions (H x W x D)

30.12" x 7.62" x 7.06" (765.1mm x 193.5mm x 179.3mm)

Product Weight 10 lb. (4.53 kg)

Shipping Weight 14 lb. (6.35 kg)

Trove3SWC:

- Four (4) single knockouts 2.415" (2" Conduit)
- Eight (8) double knockouts
1.362" (1" Conduit) / 1.115" (3/4" Conduit)

Capacity

- Accommodates up to four (4) 12VDC/40AH batteries

Physical and Environmental

Dimensions (H x W x D)

36.12" x 8.12" x 7.06" (917.5mm x 206.2mm x 179.3mm)

Product Weight 15 lb. (6.8 kg)

Shipping Weight 19 lb. (8.6 kg)

Trove3BWC and Trove3SWC


Trove Compatible Battery/Wire Enclosure



Dimensions and Drawing

Trove3BWC Dimensions (H x W x D approximate)

30.12" x 7.62" x 7.06" (765.1mm x 193.5mm x 179.3mm)

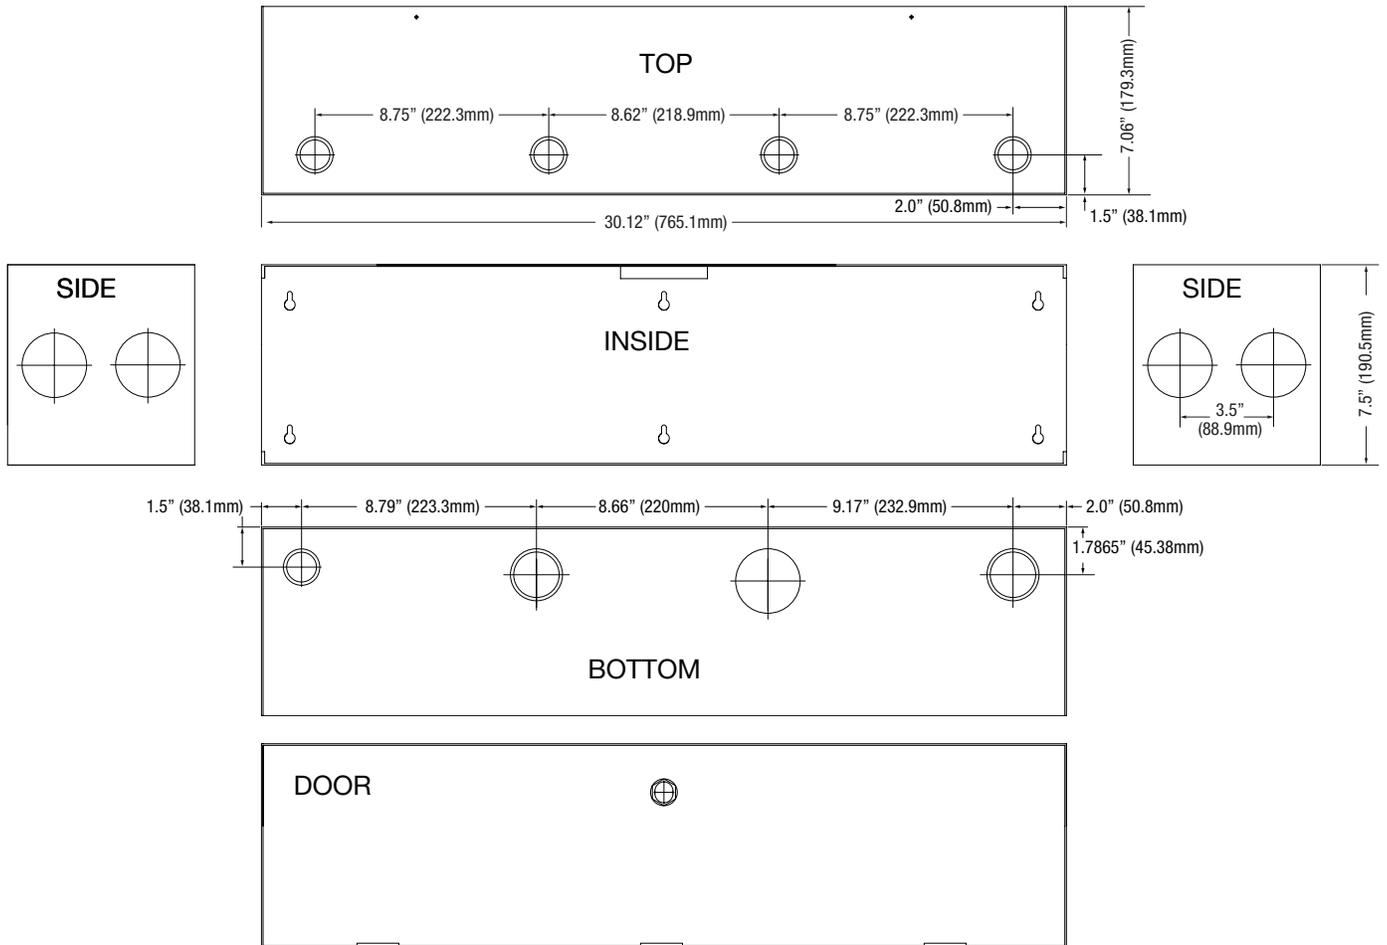

Trove3BWC and Trove3SWC

Trove Compatible Battery/Wire Enclosure



Dimensions and Drawing

Trove3SWC Dimensions (H x W x D approximate)

36.12" x 8.12" x 7.06" (917.5mm x 206.2mm x 179.3mm)

