


BC750

Power Supply/Battery Enclosure

Altronix BC750 is a power supply/battery enclosure that can accommodate a wide variety of Altronix power supplies, sub-assemblies, and accessories. Altronix enclosures feature ample knockouts that are suitable for 0.75" and 1" conduits.

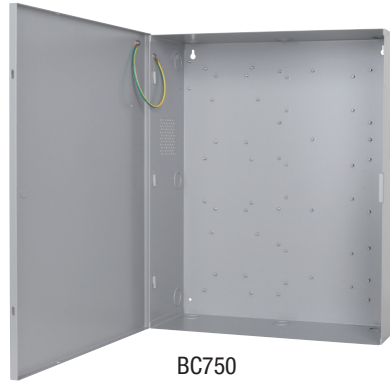

BC750



BC750 with optional 12VDC/12AH batteries

Specifications

Features

- 16 Gauge steel enclosure
- Ample knockouts accommodating either 0.75" or 1" conduits for convenient access
- Cam lock and keys are included

Capacity

- Enclosure accommodates up to two (2) 12VDC/18AH or up to four (4) 12VDC/12AH batteries

Physical and Environmental

Dimensions (H x W x D)

Enclosure: 20.5" x 16.5" x 6.25" (520.7mm x 419.1mm x 158.8mm)
 Shipping: 24.75" x 20.25" x 7.875" (628.7mm x 514.4mm x 200mm)

Weight (approx.)

Product: 19.4 lb. (8.8 kg)
 Shipping: 24.8 lb. (11.25 kg)

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our enclosures.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution


Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/accessories in any metal enclosure or backplane.

BC750

Power Supply/Battery Enclosure

Product Position Chart for the Following Models:

Altronix Products	Mounting
Power Supply/Chargers: AL300ULXB, AL400ULXB2, AL600ULXB, AL1012ULXB, AL1024ULXB2, eFlow3NB, eFlow4NB, eFlow6NB, eFlow102NB, eFlow104NB, eFlow15UB, Tango1B, POE75, POE201, POE240, POE360, POE367, OLS75, OLS120, OLS120D2, OLS180, OLS200, OLS250, OLS350 <i>(220VAC Input power supplychargers are also accommodated)</i>	(A)
Sub-Assemblies: ACM8(CB), ACMS8(CB), ACMS12(CB), LINQ8ACM(CB)	
AL175ULB, AL176ULB, AL201ULB, ACM4(CB), LINQ8PD(CB), MOM5, PD4UL(CB), PD8UL(CB), PDS8(CB), PDS16(CB), NetWay5A, NetWay5B, NetWay5BT(Q), NetWay5P(Q), NetWay5ES(Q), VR6, VR10	(B)
T1250, T12100, T16100, T1618100	(C)
PD16W(CB)	(D)
NetWaySP3B, NetWay4EB, NetWaySP4B, NetWaySP8B, NetWay4EBTB, NetWaySP4BTB	(E)
LINQ2	(F)

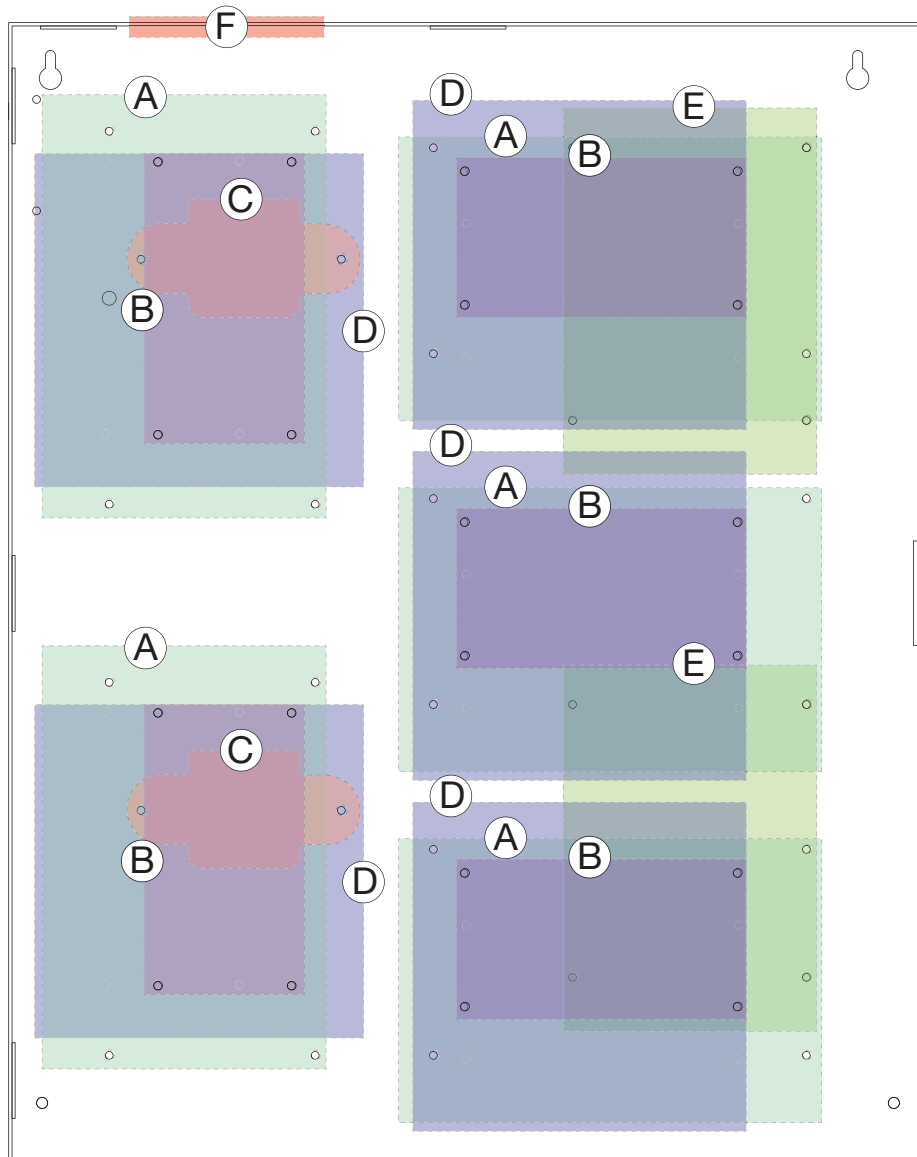

BC750

Power Supply/Battery Enclosure

Dimensions and Drawing

Dimensions (H x W x D approximate)

20.5" x 16.5" x 6.25" (520.7mm x 419.1mm x 158.8mm)

